

shindaiwa[®]**DGA37C****Tough, small, compact
quiet genset.****Powered by
ISUZU****Generating****37kVA****415V
3-phase****Sound Level (no load@7m)****53 dB(A)****Dimension****(L)1.770-(W)920-(H)1.350(mm)****Weight (kg)****1170****Engine (Diesel)****Isuzu 4JG1T****JPN T2****Features****Engine safety device****Large maintenance doors****Battery Isolator****Emergency stop switch****Australian receptacles****Alternator**

Rated Output	37kVA
	29.6kW
Voltage-Three phase	415 V (Receptacle)
Voltage-Single phase	240V (Receptacles)
Rated speed	1500 rpm
Winding	Star with Neutral
Insulation class	Alternator: F, Exciter:B

Engine

Type	Vertical Water-cooled 4-cycle Diesel
Model (Manufacturer)	4JG1T (Isuzu)
Engine Emission	Japanese Tier2
Continuous rated output	35.4kW(48.1PS)/1500min ⁻¹
Rated speed,50Hz	1500 rpm
Displacement	3.059L
Combustion system	Direct Injection (Turbo-charged)
Cooling method	Radiator, Water
Fuel tank capacity	124 L

Features

Shutdowns	Lamp indication with shutdown
Warning	Lamp indication
Dimensions	1770*920*1350mm, 1170kg
Sound Level (No Load)	53dB(A) @ 7m

shindaiwa[®]

DGA37C Latest clean engine,
quietest genset.

Large maintenance side doors

Easy access to radiator & muffler

Removable side doors

All doors are lockable



Emergency Stop Button

Indication lamp

Battery isolator


Australasian IP66 receptacles

3 phase, 415V receptacle x 3pcs

1 phase, 240V receptacle x 3pcs

3 phase ELCB, 1 phase ELCB standard

3 phase Breakers, 1 phase Breakers

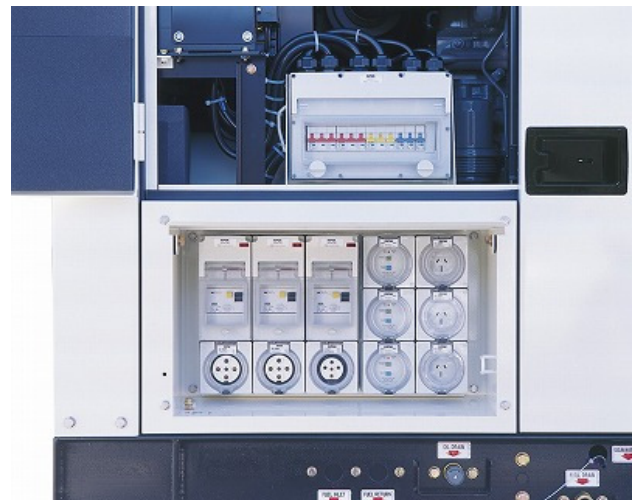

YAMABIKO

Industrial Machinery Div.

6-2-11, Ozuka-Nishi, Asaminami-Ku,
Hiroshima, Japan

Distributed by: